



Features

Meets Cisca and BS EN 12825 Standards.

55% open area to deliver more air.

Self-retracting lift handle make it easier to lift and install.

Durable factory applied powder coat that is static dissipative to provide long-wearing, corrosion resistant finish.

Maximum Cool Air for Maximum Efficiency



With a massive 55% open area, EZ-55 Cast Aluminium Floor Tile delivers more than twice the cold air volume to the server rack as ordinary perforated tiles. The built in self-retracting lift handle, makes it one of the easiest panels to lift and manage in the data centre. The Ez-55 has a factory applied, high durability; light grey powder coat finish to prevent corrosion and this heavy-duty perforated panel can withstand a point load over 4.5KN (1,000lbs per square inch) and a uniform distributed load of over 13.5KN (PSB test results available upon request).

The EZ-55 is also available with louvered damper so you can adjust the volume of air needed to your particular application and equipment load. The louvered damper is adjustable from the top so you do not have to remove the tile to make those critical adjustments. The DC-55 damper assembly has a very small profile so the under floor laminar air-flow is not affected

Specifications:

Physical	
Dimensions:	600mm x 600mm x 55mm
Weight:	7.8 kg
Material:	Cast Aluminum
Open Area:	55%
Conformance	
Standards:	MOB PF2 PS, CISCA, BS

Dimensions:

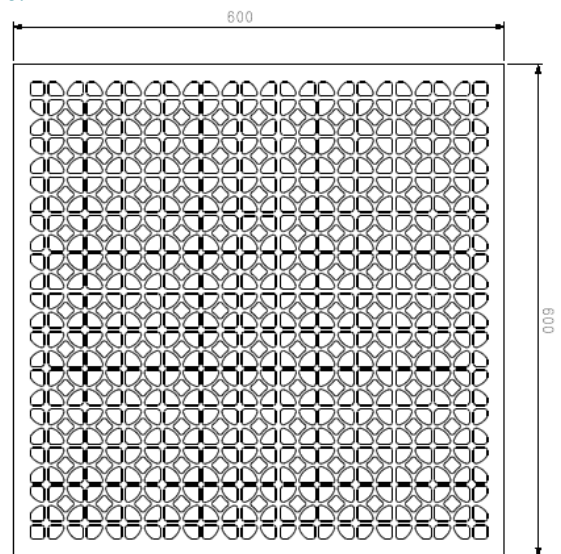

Ordering Information:

EZ-55
EZIBLANK® 55% High Output Airflow Panel



Telephone +61 (02) 9690 2852
 Facsimile +61 (02) 9698 6952
 enquiries@eziconnect.co
 www.eziconnect.co