

Features

Meets Cisca and BS EN 12825 Standards.

55% open area to deliver more air.

Self-retracting lift handle make it easier to lift and install.

Durable epoxy coat that is static dissipative to provide long-wearing, corrosion resistant finish.

Maximum Cool Air for Maximum Efficiency

With a massive 55% open area, EZ-55 Floor Tile delivers more than twice the cold air volume to the server rack as ordinary perforated tiles. The built in self-retracting lift handle, makes it one of the easiest panels to lift and manage in the data centre. A durable epoxy coat (static-dissipative) finish is standard and provides a long-wearing, corrosion resistant finish to ensure years of out-standing service. Optimal supply air temperatures to Lo-Mid-Hi server inlets improves energy efficiency and equipment reliability.


Specifications:

Physical	
Dimensions:	600mm x 600mm x 55mm
Weight:	8.8 kg
Material:	Steel Panel (Epoxy finish)
Open Area:	55%
Conformance	
Standards:	MOB PF2 PS, CISCA, BS

Ordering Information:

EZ-55

EZIBLANK® 55% High Output Airflow Panel

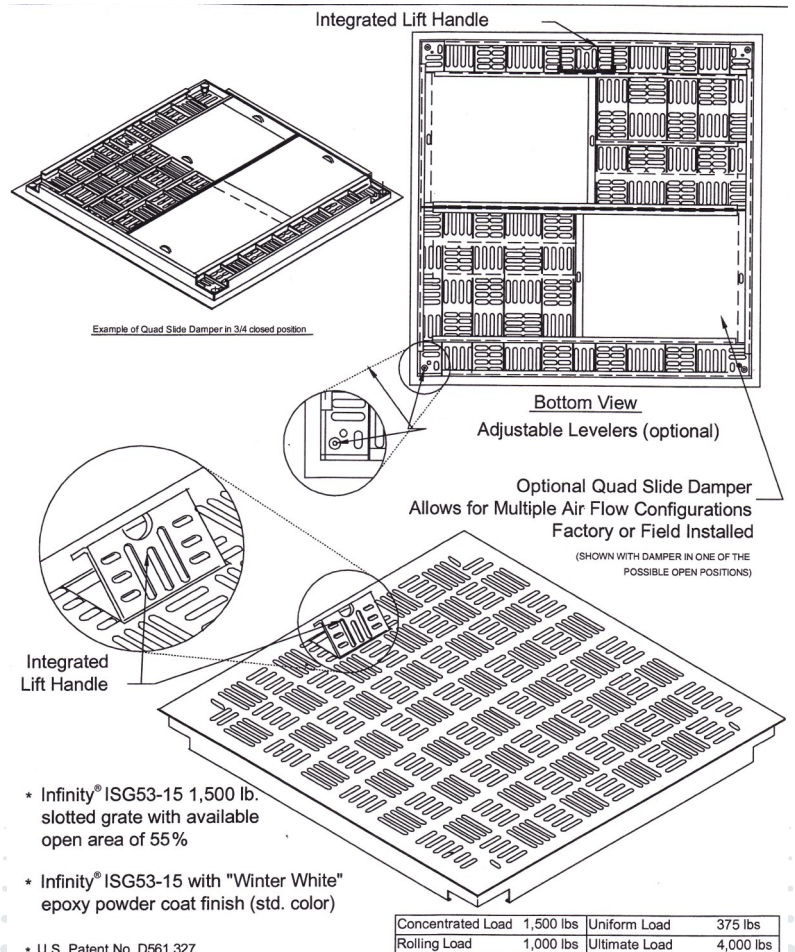

Telephone +61 (02) 9690 2852
 Facsimile +61 (02) 9698 6952
 enquiries@eziconnect.co
 www.eziconnect.co