



**Features**

**Open-ended design** for direct fitting onto existing installations.

**UL-94 compliant** fire rated body and bristles.

**Robust lightweight construction** that is strong and flexible.

**Industrial strength adhesive double-sided tape** for mounting .

**German engineered and produced** brush panels with the highest quality materials and precision.

## The open-ended flexible brush panel for sub-rack sealing

EziBlank® flexible 800mm Sub-rack dam is designed for retrofitting onto existing rack cabinet to effectively seal the bottom cavity of a rack cabinet. The high quality industrial bristles provide optimal sealing to prevent cooled air from creeping into non-production area which could cause undesirable wastage and even performance issue.

With the open-ended design, EziBlank® Sub-rack dam is supplied with high quality industrial adhesive double-sided tape for mounting onto the cabinet frame, the 0.2mm fine bristles are effective in sealing around individual or bundle of cables entering or leaving the cabinets.

Engineered and manufactured in Germany with the highest quality of materials and precision, EziBlank® Brush Panel meets the most demanding requirement in mission critical facilities.

**Specifications:**


**Physical**

Dimensions: 800mmx80mmx11mm  
 Weight: 450g each , 900g per pack of 2  
 Material: Body: Thermoplastic rubber (TPE/TPV)  
 Bristle: PA6/FH black 0.20mm.

**Conformance**

Standards: EIA-310-D  
 Environmental: RoHS  
 Toxicity: Non toxic and resistant to chemicals  
 Low Smoke, Zero Halogen  
 Flammability: Body: UL-94 HB  
 Bristle: UL-94 V0

**Dimensions**

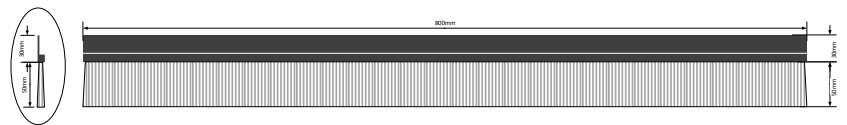

**Ordering Information:**

EZBRFLEXSUB800

EziBlank® 800mm Flexible Sub-rack Dam (Black)

