



#### **Features**

**Universal Tool-Free Mounting** designed for ease-of-use and rapid deployment.

**Robust, Flame Retardant** ABS plastic panel that meets the most demanding requirement.

**Patented Snappable Design** offers greater flexibility when applying on different sizes of RU height.

**Scratch Resistance Textured Surface** that offers both aesthetic appearance and industrial durability.

**Recyclable Lightweight Plastic** that is both durable and environmentally friendly.

# **Specifications:**

## Physical

Dimensions: 270 x 483 x 19 (6RU Panel, in mm)

Weight: 430g per panel or 4.3kg per pack of 10.

Packaging: 500 x 300 x 130 (mm), 4.3kg

Panel: Impact resistant, water resistant,

anti-static ABS plastic

Material:

Knob Latch: Ethylene Propylene Thermoplastic elastomer (EPTR)

### Conformance

Standards: EIA-310-D Mounting Hole Spacing

Environmental: RoHS

Toxicity Non toxic and resistant to chemicals

Flammability Data centre ready UL94-V0 flame retardant ABS plastic.

# Ordering Information:


## BKPNL01U-BL

EZIBLANK® 6-RU Blanking Panel (Universal, Black, Pack of 10)

# The best 6RU blanking panel that fits any 19" rack cabinet.

EZIBLANK® 6-RU Blanking Panel is a well received innovative Australian data centre product that is made of the high quality UL94-V0 flame retardant ABS plastic. The latest addition of EziBlank® Blanking Panels is assembled with specially designed knob latches that are made of medical grade thermoplastic elastomer rubber. The panel also has moulded positioning studs to assist with the alignment of the panel so that it can be installed easily onto any EIA-310 -D compliant 19" server rack regardless of the type of mounting hole.

The modular feature of the EziBlank® 6-RU Blanking Panels makes it the perfect server rack accessory for data centre operators where separated panels can be installed and reused onto different RU heights of unused space.

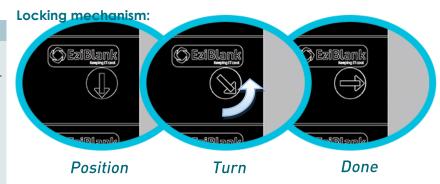

## **Dimensions:**

	•	482.0	-
	<b>(</b>	0	© Extiliants
	<b>(</b>	0	© Extiliants
27	<b>(</b>	0	© Extiliants
266.7	<b>(</b>	0	© Extiliants
	<b>(1)</b>	0	© Extiliants
	<b>(1)</b>	0	© Exiliant

